

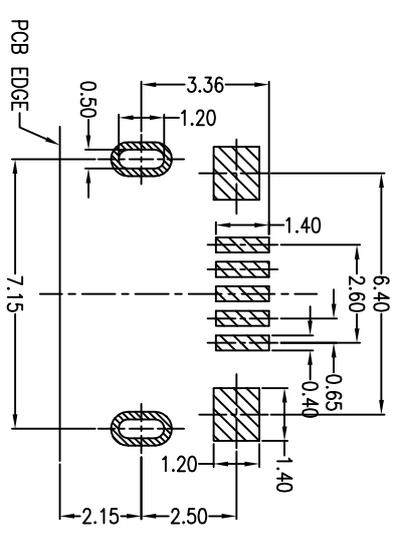
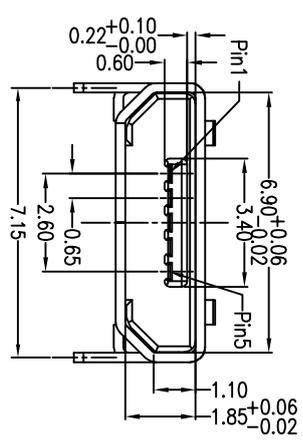

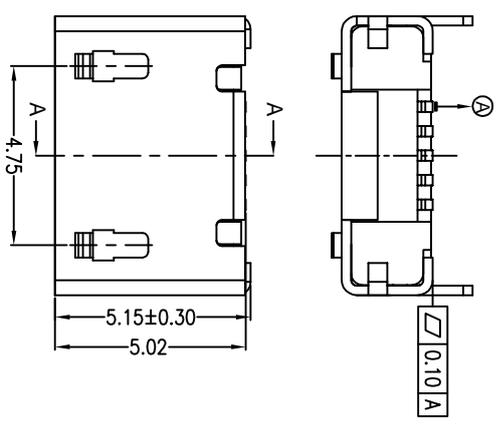


| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
|------|-----------------------|---------|------|
| | | | |



RECOMMENDED PCB LAYOUT
PCB图仅供参考



- Note:
1. Specification:
- 1.1 Current rating: 1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - 1.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 1.3 Contact resistance: 30 mΩ Max.
 - 1.4 Insulation resistance: 100 MΩ Min.
 - 1.5 Total mating force: 3.57 Kgf Max.
 - 1.6 Total unmating force: 1.0 Kgf Min.
 - 1.7 Temperature range: -30°C~80°C

| | | | | |
|---|---------------|-----------------------------|-----------------------|-----------------|
| C | SHELL | 1 | copper alloy,t=0.25mm | TIN PLATING |
| B | CONTACT | 5 | copper alloy,t=0.20mm | GOLD PLATING |
| A | HOUSING | 1 | HIGH TEMP.G./FUL94V-0 | |
| NO | DESCRIPTION | QTY | MATERIAL | PLATING & COLOR |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | | |
| 3G ENTERPRISE LIMITED | | | | |
| TITLE: Micro usb 5P B Type 插板7.2 无柱无导位 (外流品(量产) 插板 1.1) | | | | |
| DECIMALS: ANGLES: | | DWN ANDY | | |
| X | :±0.15 X :±1° | PART NO. 2UB2006-5P0176 | | |
| X.X | :±0.10 | SCALE: UNIT: mm | | |
| X.XX | :±0.05 | CHKD APVD | | |
| | | SIZE: A3 SHEET: 10F 1 REV:A | | |
| CUSTOMER COPY | | | | |