
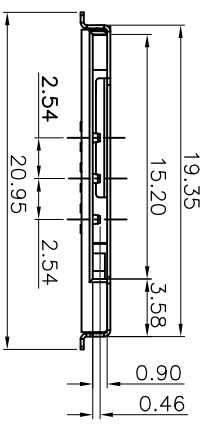
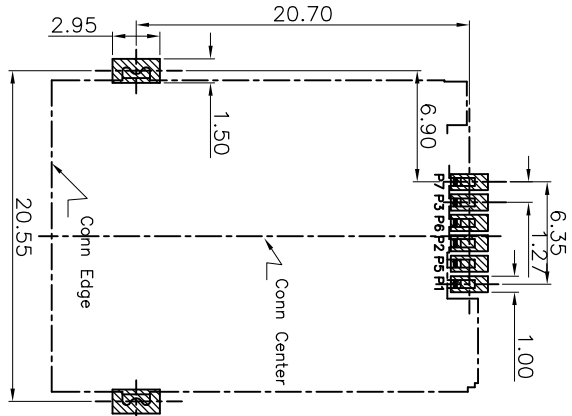
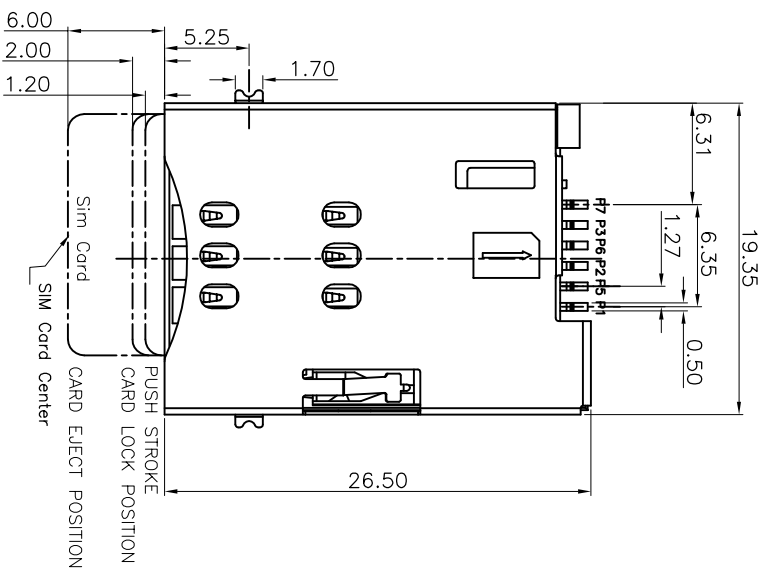


REV.	EGN.NO.	MODIFY CONTENT	DATE
A		NEW	2016/05/13

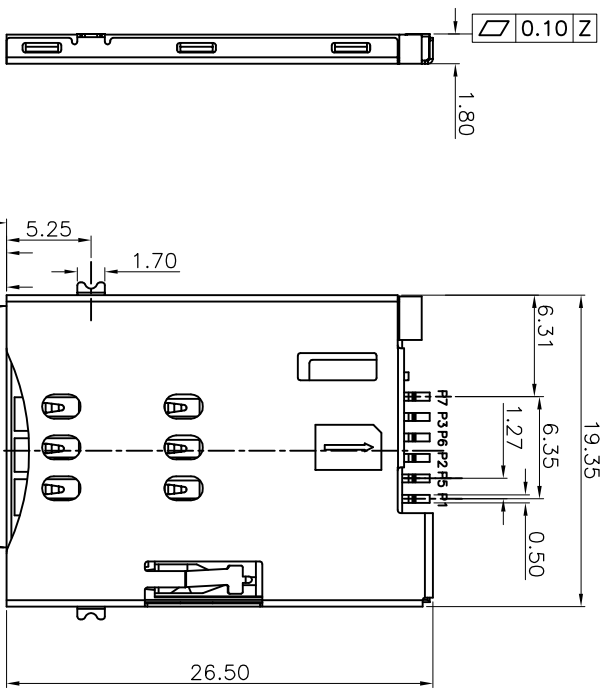

Specification:

- *Electrical Characteristics:
Current Rating:0.5A.
Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000Megohms Minimum at DC 500V
- *Mechanical Characteristics:
Contact Resistance:100Miliohms Maximum.
Mating Cycles:3000 Insertions.
- *Environmentai:
Operating Temperature: -40°To +60°

CONNECTOR TERMINAL NO	PIN NO
PIN 1	VCC:PWR SIGNAL AND GND
PIN 2	RST:RESET SIGNAL
PIN 3	CLK:CLOCKING SIGNAL
PIN 5	GND:PWR SIGNAL AND GND
PIN 6	VPP:PROGRAMMING VOLTAGE
PIN 7	I/O:SERIAL DATA INPUT/OUTPUT

GENERAL TOLERANCE	DWG NO.	JYSA1605-001	APPD:	WIND	Scale	1:1
X±0.25	X:±5'	SIM CARD PUSH 6PIN H=1.80mm 无柱	CHKD:		UNIT	mm
X±0.20	X:±2'		DR:			
.XX±0.15	.XX'±1'	Part NO.	Date	2016/05/13		
.XXX±0.08	.xxx'±0.5'					
SHEET 1/1						



杰宇森电子有限公司
JIE YU SEN ELECTRONIC CO., LTD.