

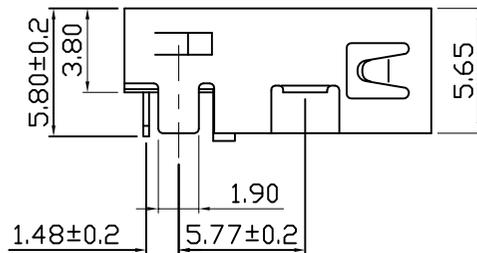


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2012/09/05



SPECIFICATIONS

1)Electrical:



- 1.1 Contact Resistance: 30 mΩ Max
- 1.2 Insulation Resistance: 1000MΩ Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating 1.5AMP Max.
- 1.5 Total Mating Force: 4.5kg Max.
- 1.6 Total Unmating force: 0.7kg Min.
- 1.7temperature Rage: -25° +70°

2)Material:

- 2.1 Housing: High temperature Plastics UL94V-0
- 2.2 Standard: PBT+30%G.F
- 2.3 Contact: brass

3)Finishing:

- 3.1 platingAu or Sn Over 100u" Ni
- 3.2 Crimp Terminal :Gold-plated contact points. Tin-lead foot
- 3.2 Shell: Nickel-plating

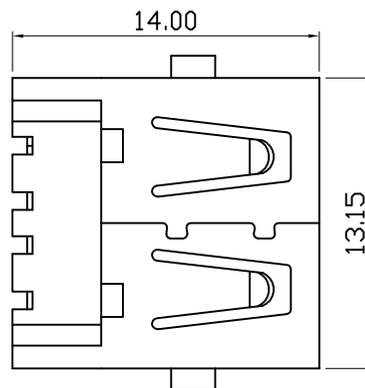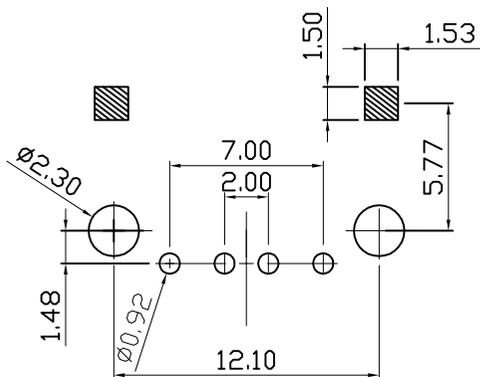

GENERAL TOLERANCE		DWG NO.	JYSA1617-001	APPD:	WIND	Scale	1:1
X.±0.25	x.'±5'	Title	USB AF 2.0 沉板 L=14.00 前贴后插 平口	CHKD:		UNIT	mm
.X±0.20	.x'±2'			DR:			
.XX±0.15	.xx'±1'	Part NO.	JYS-USB140-038	Date	2012/09/05		
.XXX±0.08	.xxx'±0.5'			深圳市杰宇森电子有限公司 Shenzhen JieYuSen electronic co., LTD.			
SHEET	2/2						