



REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2022/05/29



B12	GND
B9	VBUS
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0  
 CONTACT: COPPER ALLOY.  
 GOLD PLATED Min ON CONTACT AREA, 100u"  
 Min TIN (LEAD FREE) ON SOLDER AREA,  
 SHELL: SUS201-H, T=0.25±0.03mm  
 50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.  
 EXTRACTION: 8~20N AFTER TEST.  
 DURABILITY: 5000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS;  
 1.25A FOR GND PIN.  
 0.25A FOR OTHER.

VOLTAGE: 20 V MAX  
 WITHSTANDING VOLTAGE: 100V AC R.M.S.  
 CONTACT RESISTANCE: 40mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN.



4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标示"⊗"者为首样全检, 重点管控尺寸.

6. 产品符合RoHS标准.

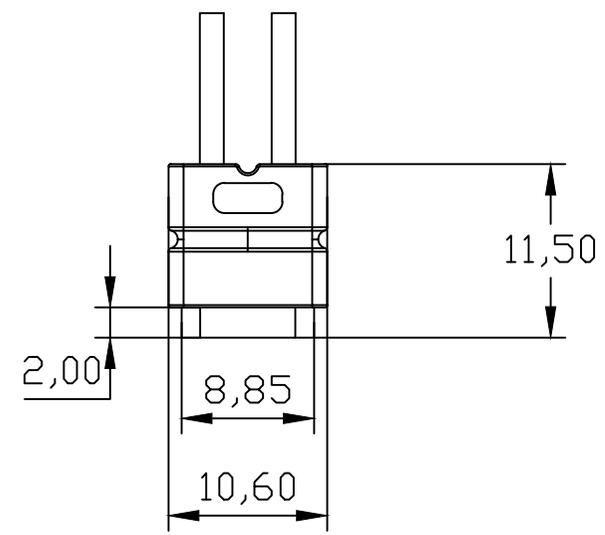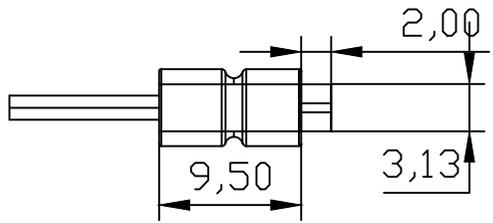

GENERAL TOLERANCE		DWG NO.	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	USB TYPE C/F 2PIN 防水型	CHKD:	UNIT	mm
.X±0.35	.x'±2'					
.XX±0.25	.xx'±1'		JYS-UTC115-128	Date	2022/05/29	
.XXX±0.15	.xxx'±0.5'	Part NO.	<b>Jysconn</b> Shenzhen		Shenzhen	
SHEET	1/1		<b>JYSCONN Electronics Co., LTD.</b>			