
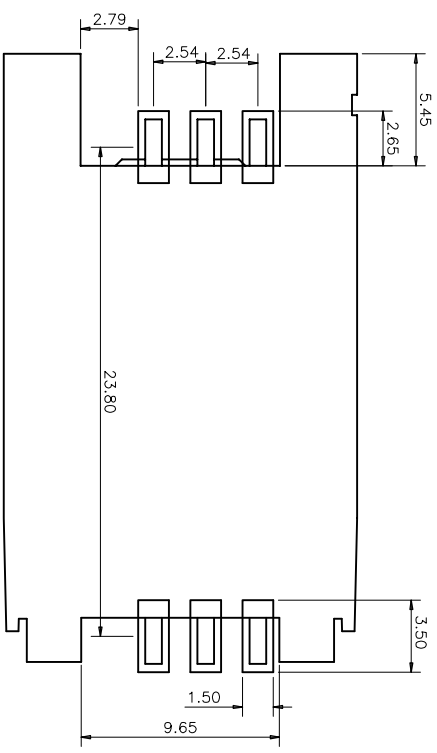
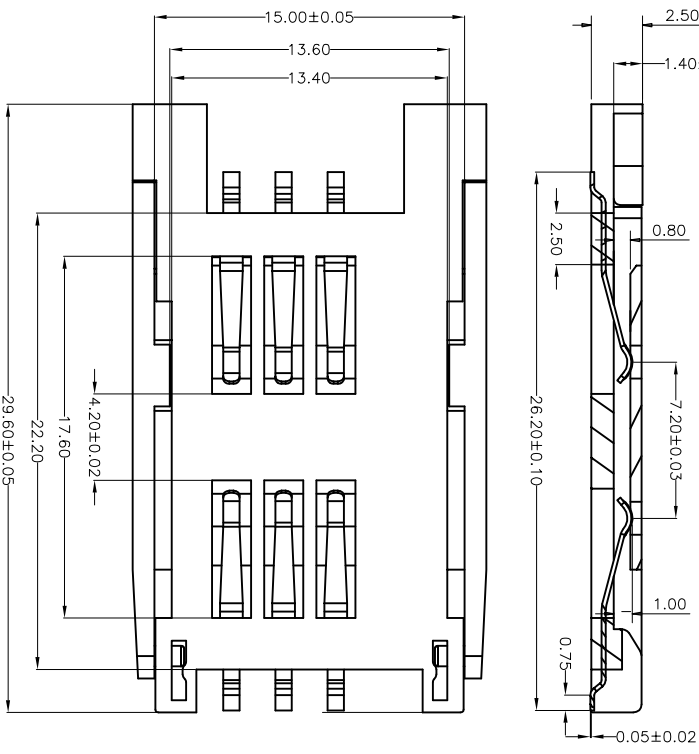
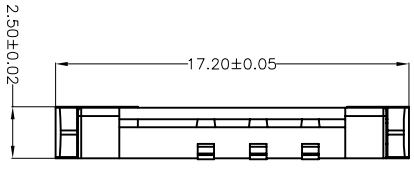


REV.	EGN.NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31

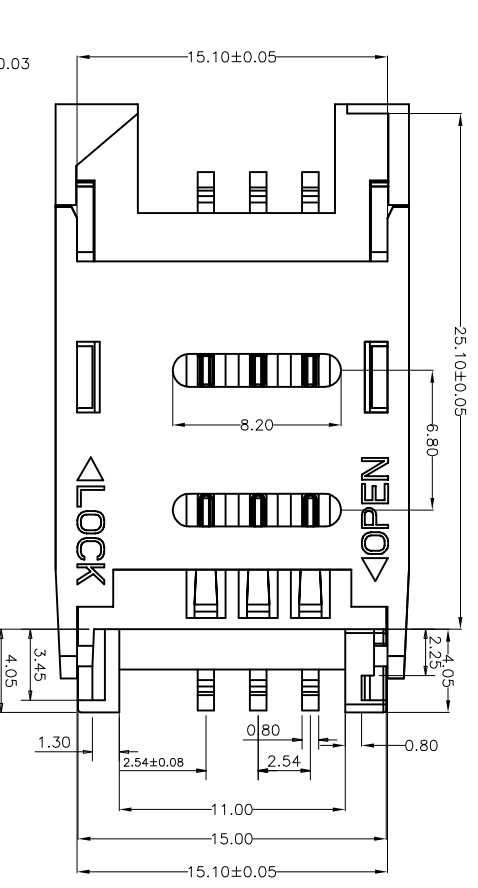

RECOMMEND PCB LAYOUT  
TOLERANCE±0.05MM

- 备注:
1. 胶芯材质: LCP (E4711), BLACK U194-V0
  2. 端子材质: C5191-BH, T=0.15mm, 镀镍底60u", 触点与锡脚镀金1.5~3u".
  3. 有标示 ▲ 的为QC及IPQC之检验重点
  4. 有标示 ▽ 的为AI检验尺寸
  5. 有标示 ⊗ 的为变更处记号
  6. 平面度标准: 0.08mm MAX.
  7. 产品功能区毛边不可大于0.03mm, 外观毛边不可大于0.05mm, 进胶口毛边不可大于0.10mm.
  8. 外观: 无缩水, 无变形, 无不饱模或脚胶等不良, 塑胶翘曲不可大于0.15mm, 高温后不可起袍或溶液.

GENERAL TOLERANCE		DWG NO.	JYSA1012-001	APPD:	WIND	Scale	1:1
X±0.45	X:±5'	Title	SIM CARD 6PIN 全塑(无柱)	CHKD:		UNIT	mm
X±0.35	X:±2'	Part NO.	JYS-SIM250-154	Date	2011/10/31		
XX±0.25	.XX'±1'						
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1						

杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.